

Śruba z łbem walcowym obniżonym z gniazdem sześciokątnym / Hexagon socket head cap screws with low head


Norma
Standart

DIN 7984

Zakres / Range M 3 ÷ M 24

Kl. wł. mech. / Property class 8.8; 10.9;

Materiał / Material Stal, Stal nierdzewna, metale nieżelazne
Steel, stainless steel, non-ferrous metals

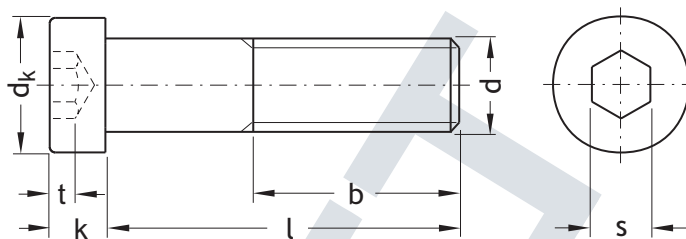

d	M 3	M 4	M 5	M 6	M 8	M 10	M 12
P	0,5	0,7	0,8	1	1,25	1,5	1,75
b _{min}	I 125	12	14	16	18	22	26
	125 < I 200	-	-	-	-	28	32
	I > 200	-	-	-	-	-	-
d _{k nom}	5,5	7	8,5	10	13	16	18
k	2	2,8	3,5	4	5	6	7
s _{nom}	2	2,5	3	4	5	7	8

d	M 14*	M 16	M 18*	M 20	M 22*	M 24
P	2	2	2,5	2,5	2,5	3
b _{min}	I 125	34	38	42	46	54
	125 < I 200	40	44	48	52	60
	I > 200	-	57	61	65	73
d _{k nom}	21	24	27	30	33	36
k	8	9	10	11	12	13
s _{nom}	10	12	12	14	14	17

P - podziałka gwintu
* - wymiary nie zalecane

P - thread pitch
* - not recommended dimensions

