

## Nakrętka sześciokątna z kołnierzem / Hexagon flange nuts

Norma  
Standart


# DIN 6923

ISO 4161  
PN 82168

Zakres / Range M 4÷ M 20

Kl. wł. mech. / Property class 8; 10; 12;

Materiał / Material Stal, Stal nierdzewna, metale nieżelazne  
Steel, stainless steel, non-ferrous metals

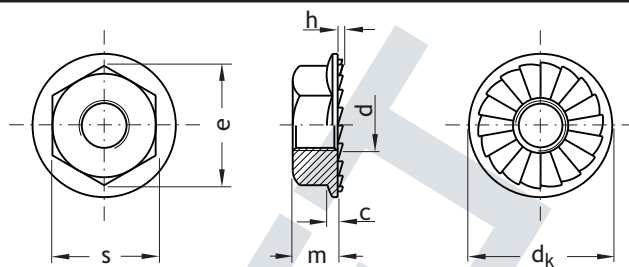

d	M 4	M 5	M 6	M 8	M 10	M 12	M 14	M 16	M 20	
	-	-	-	-	M8x1	M10x1	M12x1,5	M14x1,5	M16x1,5	M20x1,5
-	-	-	-	-	M10x1,25*	M12x1,25*	-	-	-	
P	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5	
d <sub>k max</sub>	10	11,8	14,2	17,9	21,8	26	29,9	34,5	42,8	
m	max	4,8	5	6	8	10	12	14	16	20
	min	4,5	4,7	5,7	7,6	9,6	11,6	13,3	15,3	18,9
S <sub>nom</sub>	7	8	8	13	15	18	21	24	30	

P - podziałka gwintu

\* - wymiary nie zalecane

P - thread pitch

\* - not recommended dimensions

