

Nakrętka koronowa / Hexagon slotted and castle nuts

Norma
Standart


DIN 935

ISO 7035
PN 82148

Zakres / Range M 4 ÷ M 100

Kl. wł. mech. / Property class 8; 10;

Materiał / Material Stal, Stal nierdzewna, metale nieżelazne
Steel, stainless steel, non-ferrous metals

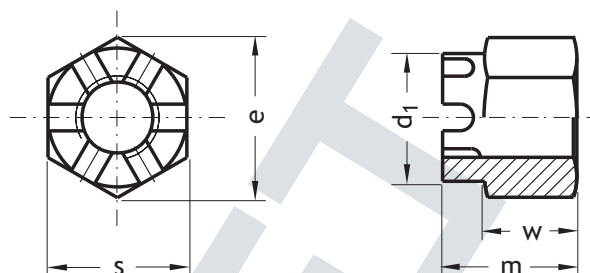

d	M 4	M 5	M 6	M 8	M 10	M 12	M 14*	M 16	M 18*	M 20	
	-	-	-	-	M8x1	M10x1	M12x1,25	M14x1,5	M16x1,5	M18x1,5	M20x1,5
-	-	-	-	-	M10x1,25	M12x1,5	-	-	M18x2	M20x2	
P	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5	2,5	
m	max=nom	5	6	7,5	9,5	12	15	16	19	21	22
	min	4,7	5,7	7,14	9,14	11,57	14,57	15,57	18,48	20,16	21,16
w	min	2,9	3,7	4,7	6,14	7,64	9,64	10,57	12,57	14,57	15,57
	max	3,2	4	5	6,5	8	10	11	13	15	16
d ₁	min	-	-	-	-	-	17	19	22	25	28
	max	-	-	-	-	-	16,57	18,48	21,48	24,3	27,3
S _{nom}	7	8	10	13	17	19	22	24	27	30	
Zawlecзка DIN 94 Split pin DIN 94	1x10	1,2x12	1,6x14	2x16	2,5x20	3,2x22	3,5x25	4x28	4x32	4x36	

d	M 22*	M 24	M 27*	M 30	M 33*	M 36	M 39*	M 42	M 45*	M 48	
	M22x1,5	M24x2	M27x2	M30x2	M33x2	M36x3	M39x3	M42x3	M45x3	M48x3	
	M22x2	-	-	-	-	-	-	-	-	-	
P	2,8	3	3	3,5	3,5	4	4	4,5	4,5	5	
m	max=nom	26	30	30	33	35	38	40	46	48	50
	min	25,16	29,16	29,16	32	34	37	39	45	47	49
w	min	17,57	21,48	21,48	23,48	25,48	28,48	30,28	33,38	35,38	37,38
	max	18	22	22	24	26	29	31	34	36	38
d ₁	min	32	38	38	42	46	50	55	58	62	65
	max	31	37	37	41	45	49	53,8	56,8	60,8	63,8
S _{nom}	32	41	41	46	50	55	60	65	70	75	
Zawlecзка DIN 94 Split pin DIN 94	5x36	5x40	5x45	6,3x50	6,3x56	6,3x63	6,3x71	8x71	8x80	8x80	

P - podziałka gwintu
* - wymiary nie zalecane

P - thread pitch
* - not recommended dimensions

1/1

