


Śruba z łbem grzybkowym z podsadzeniem / Mushroom headsquare neck bolts

Norma
Standard

DIN 603

ISO 8677
PN 82406

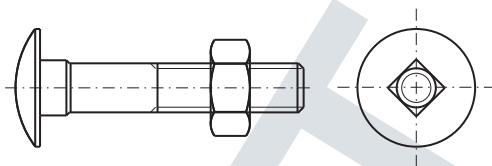

Warunki techniczne dla śrub do M 39 / Technical specifications for bolts to M 39

Materiał Material		Stal Steel	Stal nierdzewna Stainless steel	Metale nieżelazne Non-ferrous metals
Wymagania ogólne General requirements	Norma Standard	DIN 8992		
Gwint Thread	Tolerancja Tolerance	8g		
	Norma Standard	ISO 724, ISO 965-1		
Własności mechaniczne Mechanical properties	Klasa własności mechanicznych Property class	4.6; 4.8; 8.8	A2-70 A4-70	
	Norma Standard	DIN ISO 898 -1	DIN ISO 898 -1	
Tolerancje Tolerances	Klasa dokładności Property grade	C		
	Norma Standard	DIN ISO 4759-1		
Powierzchnia Surface treatment	Dla nieciągłości powierzchni ISO 26157 Limits for surface discontinuities are covered in ISO 26157 Dla powłok galwanicznych IS 4042 Requirements for electroplating are covered in ISO 4042 Dla powłok ogniowych DIN 267-10 Requirements for hot dip galvanized are covered in DIN 267-10 Dla cynkowych powłok płatkowych ISO 10683 Requirements for zic flake coating are covered in 10683		Bez pokrycia Plain Pasywowane ISO 16048 Passivated ISO 16048	
Odbiór Acceptance	Procedura odbioru ISO 3269 Acceptance procedure is covered in ISO 3269			

